


Overview

DZS' MXK intelligent terabit access concentrator reflects a clean-sheet approach to truly scalable multi-service architecture, designed to meet the rapidly evolving demands on access networks. MXK platforms offer unmatched bandwidth – with non-blocking capacity of up to 3,600 x 100Mbps GPON subscribers or 360 x 1G Active Ethernet subscribers per chassis – while leveraging DZS' well-proven SLMS access operating system for sophisticated service intelligence and ease of management.

The MXK line includes several options for FTTx network design. Its ITU-standard GPON line card provides 2.5Gbps downstream and 1.25 Gbps upstream bandwidth over a passive optical network on each of 8 ports per card. Using 64 splits per PON, the largest MXK platform can connect with up to 9,216 ONTs, the industry's highest OLT density.

GPON provides one of the most cost-effective ways for operators to deploy fiber-based services to the home, business, or node. With GPON splitters that can be co-located with at the CO or installed remotely in the network, the service provider can choose the network architecture that finds the right balance between capital cost optimization and ease of upgradeability.

The MXK platforms' non-blocking architecture and intelligent processing

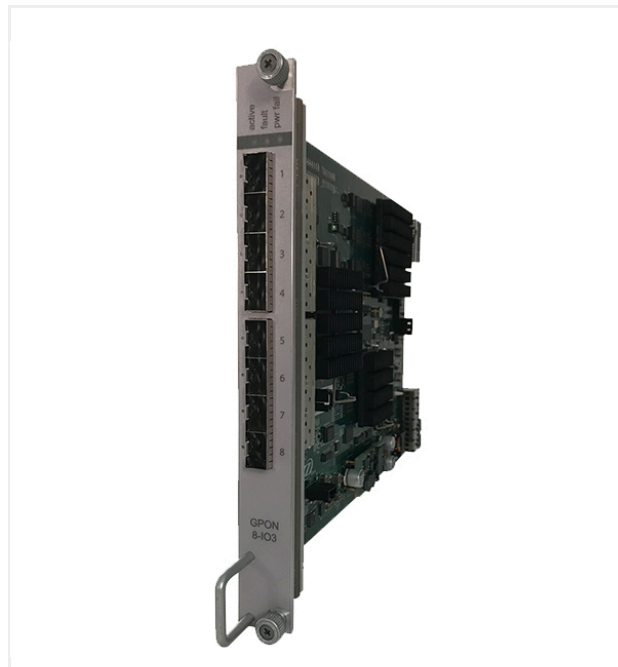

enable GPON networks to deliver uncompromising quality for the full range of triple-play services.

DZS' SLMS (Single Line Multi-Service) access operating system provides intelligent functionality across all the company's hardware products. Driven by 8 years of experience in commercial operation and collaboration with 1000+ service providers worldwide, DZS' SLMS software delivers functionality critical to today's access networks in advanced networking, quality of experience, triple-play, security, and management.

Specifications

KEY FEATURES

- Unrivalled GPON port density with 8-port card – supports up to 9,216 ONTs per chassis
- ITU standard GPON
- Class B+ and Class C SFP optics
- Layer 2 and 3 features for guaranteed QoS, video replication, and security
- Fully standards-compliant Smart OMCI management of ONTs
- Industry-leading SLMS traffic management provides QoS, traffic shaping, and dynamic bandwidth allocation to support triple-play and other applications
- Full range of management options including SNMP, CLI, WebUI, and integration into DZS's ZMS Element Management System and OSS Gateway

POWER

- 73W nominal, 85W maximum (nominal + eight 1.5W transceivers)

INTERFACES

- 8 x GPON SC Interfaces (Front Panel)

STANDARDS SUPPORT

- Bridging 802.1D
- VLAN 802.1Q with 802.1p
- Multicast IGMP v2 and v3 (Snooping, proxy)
- ITU G.984.1- 984.4
- ITU G.988
- IEEE 802.3ah
- IEEE 802.3ad LACP
- DHCP Relay

MANAGEMENT

- ZMS (Zhone Management System) and OSS Gateway
- Terminal for Command Line Interface (CLI)

REGULATORY COMPLIANCE

- Safety: UL 60950-1; CSA 60950-1; EN 60950-1
- Emissions: EN 55022A; FCC PART 15A; EN 300 386; ICES-003 Class A

BANDWIDTH/DISTANCE

- Downstream 2.488Gbps/Upstream 1.244Gbps
- Class B+,C Optics (20Km Max)

OPERATING REQUIREMENTS

- Ambient Operating Temperature: -40°C to 65°C
- Non operating temperature: -40°F to 158°F (-40°C to 70°C)
- Humidity: Up to 85%, non-condensing
- Altitude: -200ft to 16,500ft (-60m to 5,000m)
- Heat generated: 256 BTU nominal; 290 BTU max

GPON Line Card

MODEL	DESCRIPTION
MXK-GPONX8-IO3	ROHS, REQ.MIN 2.5.2.273.10, MXK LINE CARD W/8 PRTS OF GPON SFP OPTICS (2.5G DWN/1.25G UP) 2ND GEN.

GPON Transceivers

MODEL	DESCRIPTION
MXK-GPON-SFP-B+-RSSI	GPON SFP B+ OPTICS, SUPPORTS DIGITAL RSSI; USES SC/UPC CONNECTOR
MXK-GPON-SFP-C+-RSSI	GPON SFP C+ OPTICS, SUPPORTS DIGITAL RSSI; USES SC/UPC CONNECTOR (REQ. SW 2.1.2XX OR HIGHER)

Related Products

Contact

For more information, connect with us at
dazanzhone.com/contact



DZS, the DZS logo, and all DZS product names are trademarks of DZS. Other brand and product names are trademarks of their respective holders. Specifications, products, and/or product names are all subject to change without notice. Copyright ©2017 DZS. All rights reserved.