



CLOUDMESH GATEWAY

NF18MESH



The Ultimate Wi-Fi Fixer

Bring the new adaptive Wi-Fi experience to your home with **NF18MESH gateway**.



MESH ENABLED

The **NF18MESH** is a **CloudMesh Gateway** that works wirelessly with the **NS-01 CloudMesh Satellite**, forming a single powerful Whole Home Wi-Fi Mesh network with all the control and settings centralized on the gateway. The gateway becomes the Wi-Fi Mesh master node and the Wi-Fi client device roams seamlessly between satellites and the gateway.



Wi-Fi AUTOPILOT

Every **NF18MESH Gateway** includes the **CloudMesh Wi-Fi AutoPilot**.

Wi-Fi Auto-Pilot constantly scans and analyses the end-user Wi-Fi environment. If any detrimental changes are detected, the **AutoPilot** adjusts the gateway's Wi-Fi parameters. Any action taken is based on a patented and weighted algorithm ensuring that the internet connection experience is not compromised. It ensures that every Wi-Fi client device is connected on the best possible channel, using the fastest available band, at the perfect RF power level and at the closest Wi-Fi access point.



EASY PAIRING WITH CLOUDMESH SATELLITES

The **CloudMesh** system is a turnkey, out-of-the-box solution. ISP Satellite pre-provisioning is available via a cloud portal and API, allowing for a **Zero Touch** configuration experience for the end-user. There is also an easy and fast alternative for in home setup using **WPS** buttons.

KEY FEATURES CONT.



MADE FOR NBN AND UFB

Featuring a **Gigabit WAN port** as well as **VDSL2/ADSL2** technologies, the **NF18MESH** will connect with **FTTN, FTTB, FTTC** and **FTTH**. The Gateway also features **VoIP** for HD quality voice calls with the capacity to connect two (2) phones.



CLOUD ORCHESTRATION

To operate effectively, multiple Wi-Fi access points within the same environment need a centralized point of coordination and control. This is done by the **Wi-Fi Analytics Cloud**.

In addition to that, the Cloud is performing all the CPU intensive processing and is using sophisticated machine learning techniques to detect and recognize historical Wi-Fi environment patterns to avoid future Wi-Fi interference.



WORKS WITH Wi-Fi ANALYTICS PLATFORM

The **CloudMesh Wi-Fi Analytics Platform** is a turnkey, CPE integrated, cost-effective solution that provides the ultimate visibility into the health of the subscriber's Wi-Fi home network.

It can dramatically lower operational costs and create superior end-user experiences. It does this by enabling proactive diagnostic, management and control of subscriber's home Wi-Fi environment, helping to resolve even the most elusive Wi-Fi problems.



PARENTAL CONTROL

Control access for each family member, including filtering social platforms, video streaming and gaming.

Restrict internet access based on time of day.





INTUITIVE USER EXPERIENCE

A new user interface offers effortless navigation and greater visibility into the home network for an improved customer experience including features such as a **Quick Start Wizard**, and a map of connected devices helping end-users to identify connection issues faster and reduce the number and duration of calls to customer service.

The new web interface is smartphone friendly. End-users can **scan the QR Code** on the back of the **gateway** to join the **Wi-Fi network** and access the web interface from any device using **cloudmesh.net** URL.



PRODUCT INTERFACES

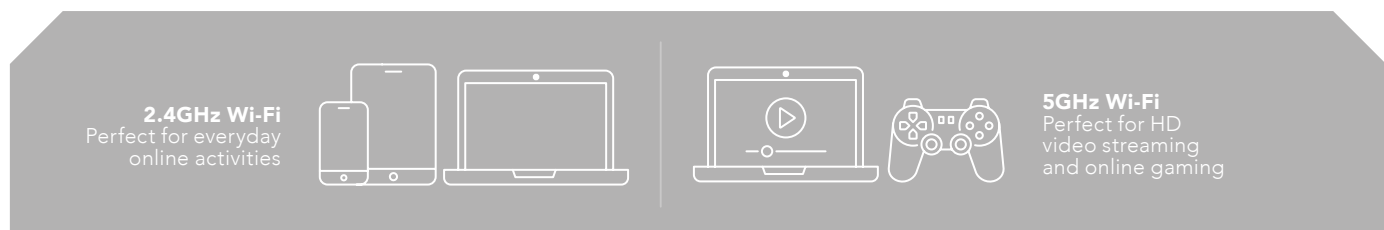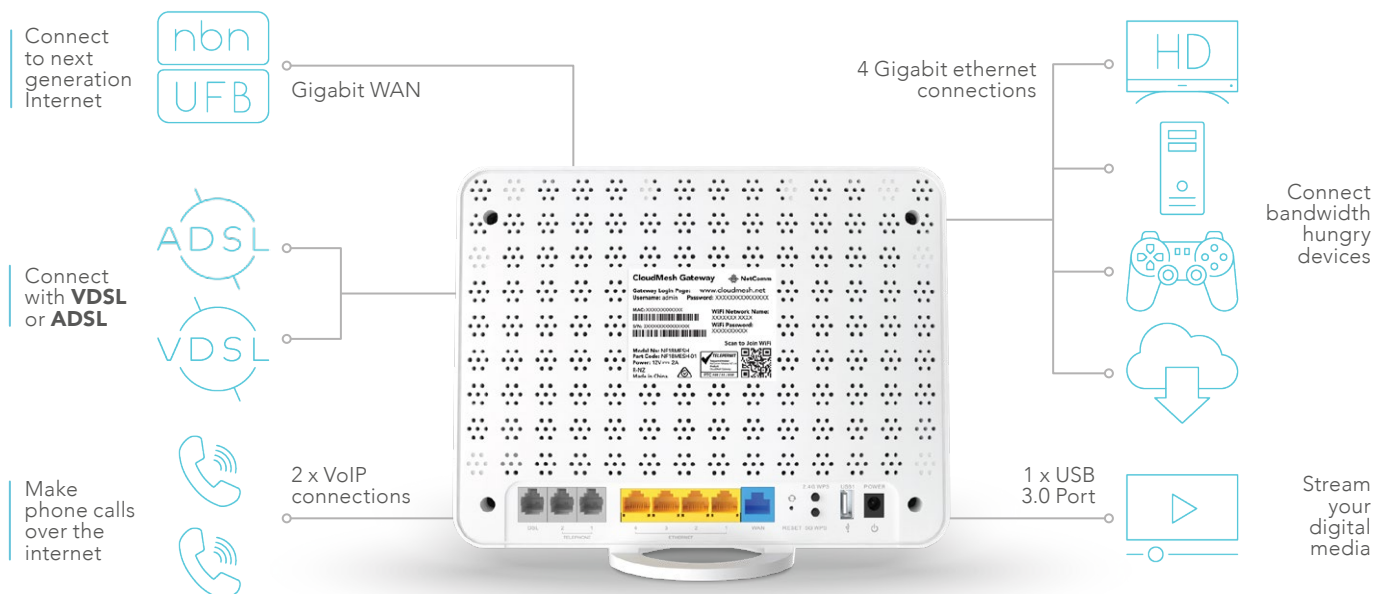


PERFECT FOR

- › ISPs who want to reduce number of Wi-Fi related support calls by using the self-adapting Wi-Fi Technology on the CPE gateway.
- › ISPs who want end-to-end connection visibility and control using the Wi-Fi Analytics Platform.
- › End-Users who want to seamlessly expand their Wi-Fi network with CloudMesh Satellites.


FEATURES AT A GLANCE

- › Mesh Enabled for seamless connection to CloudMesh Satellites
- › Automated Wi-Fi issue resolution with Wi-Fi Auto Pilot
- › Gigabit connection to NBN and UFB fibre networks
- › Support for VDSL2/ ADSL2+ and Voice
- › Wi-Fi visibility and assurance with the Wi-Fi Analytics Platform


WHAT'S IN THE BOX




1 x NF18MESH
CloudMesh Gateway




1 x Power Adapter




1 x Ethernet Cable
(1.5m, RJ45)



1 x Phone Cable
(1.5m, RJ11)



1 x Warranty Card



1 x Quick Start Guide



TECHNICAL SPECIFICATIONS

ENVIRONMENTAL AND PHYSICAL

- › Operating temperature: 0-40°C
- › Humidity: 10%-95% non-condensing
- › Storage temperature: -10-60°C
- › Humidity: 5%-95% non-condensing
- › DC Input Voltage: 12V/2A
- › Dimensions: 230 (w) x 200 (h) x 75 (d) mm
- › Weight: 558g

DEVICE INTERFACE

- › 1 x RJ45 10/100/1000Mbps WAN port
- › 1 x ADSL / VDSL port
- › 4 x RJ45 10/100/1000Mbps LAN ports
- › 2 x RJ11 Phone ports (VoIP)
- › 1 x Reset button
- › 2 x WPS buttons (2.4GHz and 5GHz)
- › 1 x Power jack
- › 2 x USB 2.0 Ports (storage)
- › 1 x Power switch
- › LED (Power/DSL/Internet/WAN/LAN1-4/ 2.4GHz/5GHz/WPS/USB1-2/ Phone1-2)

VDSL:

- › PPPoE/PPPoA/IPoA/ Static IP/ Dynamic IP/Bridge
- › ITU-T G.993.2 VDSL2
- › Supports 8a,8b,12a,12b,17a profile
- › Supports ATM and PTM
- › Supports G.INP

ADSL2+:

- › PPPoE/PPPoA/IPoA/Static IP/ Dynamic IP/Bridge
- › ITU G.992.1 (G.dmt)
- › ITU G.992.2 (G.lite)
- › ITU G.992.3
- › ITU G.992.3 (Annex J)
- › ITU G.992.3 (Annex L)
- › ITU G.992.5
- › ITU G.992.5 (Annex M)
- › Supports multiple PVCs

ETHERNET WAN

- › PPPoE, DHCP client, Static IP

WIRELESS

- › Compatible with IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and IEEE 802.11ac
- › Supports concurrent dual band (2.4GHz/5GHz) wireless
- › SSID broadcast or in stealth mode
- › Auto/Manual Channel selection
- › WEP/WPA/WPA-PSK/WPA2/WPA2-PSK
- › WPS button (Wi-Fi Protected Setup)

VOIP PROTOCOL

- › SIP2.0
- › G.711, G.723 and G.726
- › FAX T.38 FAX Relay

MEDIA

- › File sharing
- › DLNA

SECURITY

- › Firewall
- › MAC filtering

ROUTING

- › Static Route
- › Dynamic Route (RIP v1/v2)
- › DMZ
- › Supports Layer 2 Bridge Mode

ADMINISTRATION

- › QoS
- › SNMP
- › UPnP
- › Syslog
- › Web-based UI
- › Remote Login
- › TR-069 Auto provisioning
- › Backup/Restore Settings

COMPLIANCE

- › RCM, NZ Telepermit

NetComm NF18MESH Spec Sheet Rev 3

Trademarks and registered trademarks are the property of NetComm Wireless Pty Ltd or their respective owners. Specifications are subject to change without notice. Images shown may vary slightly from the actual product.



NETCOMM
HEAD OFFICE | SYDNEY
18-20 Orion Road Lane Cove NSW 2066
Sydney | Australia | +61 2 9424 2070
www.netcomm.com



ZHONE
HEAD OFFICE | USA
5700 Tennyson Pkwy
Suite 400, Plano, TX 75024
Texas | USA | +1 877-946-6320
www.zhone.com



NetComm
a division of zhone